

Specifications:

Material And Finish:

Insulator:Nylon66 UL94V-0

Color:Natural

Rating:

Current Rating:7.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25~+85°C



Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute

Qty/Bag:1000PCS

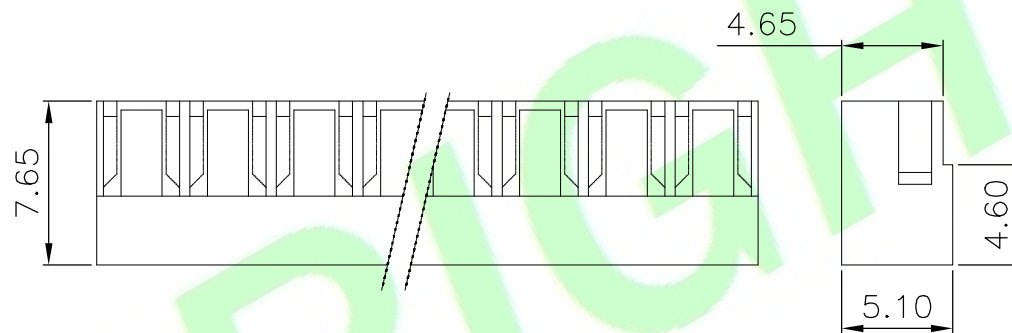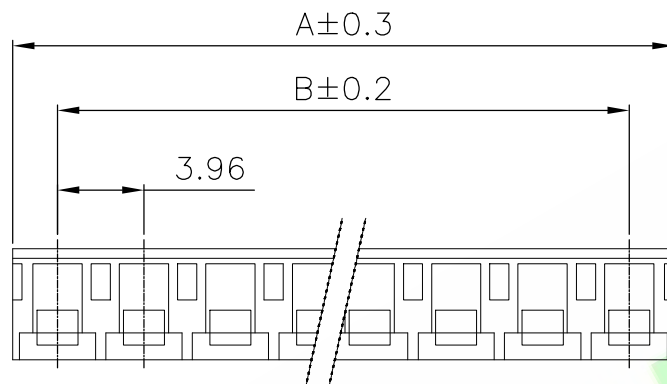


PIN	A	B
2	8.56	3.96
3	12.52	7.92
4	16.48	11.88
5	20.44	15.84
6	24.40	19.80
7	28.36	23.76
8	32.32	27.72
9	36.28	31.68
10	40.24	35.64
11	44.20	39.60
12	48.16	43.56
13	52.12	47.52
14	56.08	51.48
15	60.04	55.44

Ordering Information

H39613-XXP-01-A

- 1: — Series No.
- 2: — No. of Positions
- 3: — A:In Bag

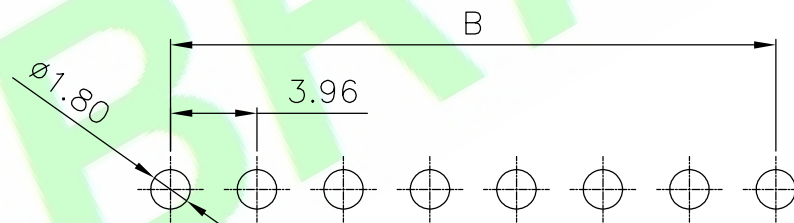

P.C.B LAYOUT

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : H39613-XP-01-A
	LINEAR	ANGLES	
CHKD.: Hu.ch	x.: ±0.35	x': REF±6°	DWG. NO.:
	x.x: ±0.30	x.x': ±3.0°	TITLE : Pitch 3.96mm Housing
APPD.: Billy	x.xx: ±0.20	x.xx': ±2.0°	DATE: 27-Aug-2023
	x.xxx: ±0.15	x.xxx':	

**HJBRIGHT** 東莞市華晶電子有限公司  
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1  
SCALE: 1:1  
UNIT: mm

THIRD ANGLE PROJECTION

**A4**

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO