



Technical Requirements:

1. All materials must meet RoHS environmental requirements
2. Line type: 22AWG;
3. Standard: UL1007;
4. Appearance requirements: no damage, dirt, bad tin plating and other phenomena.

Heat shrink tube Black

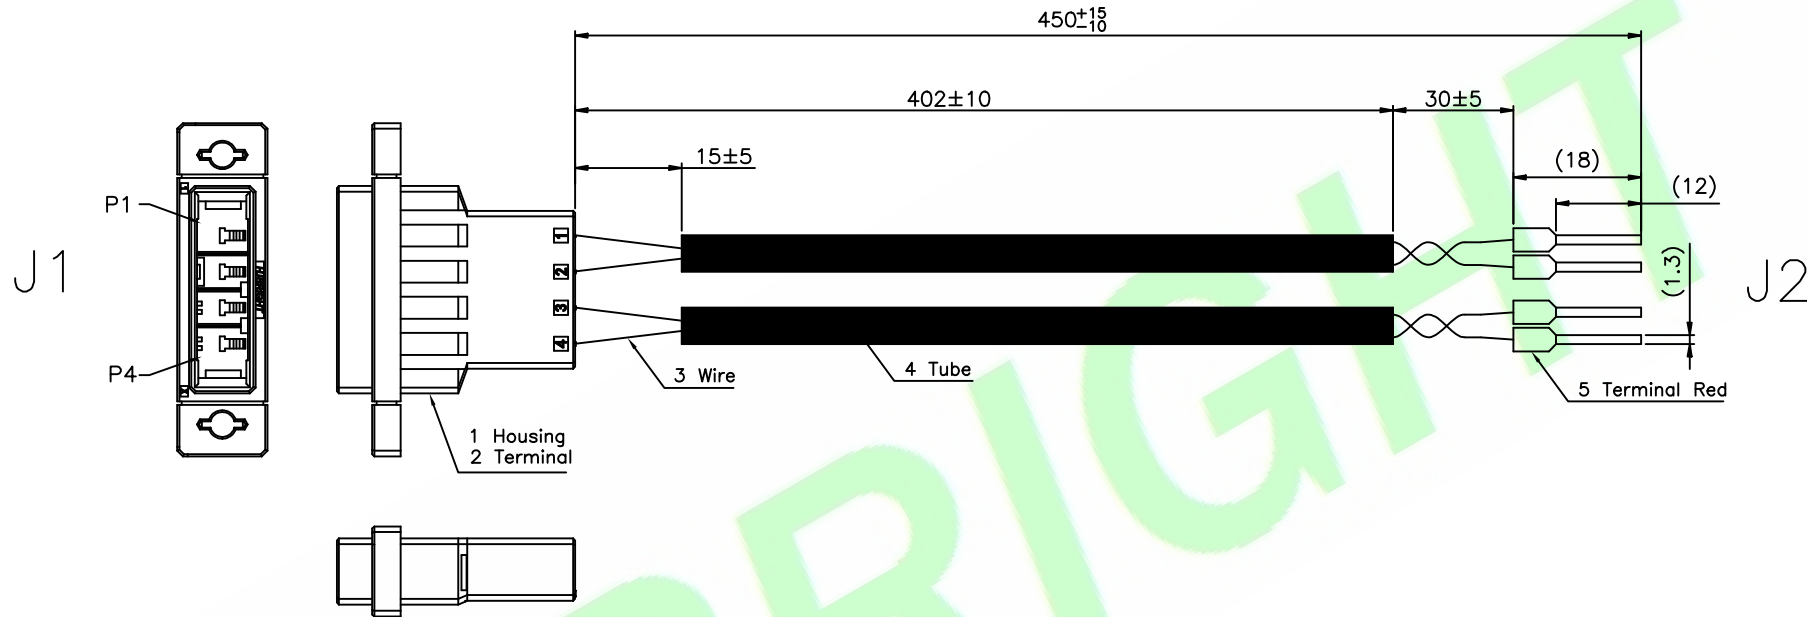

Cross Cable-Wire Diagram

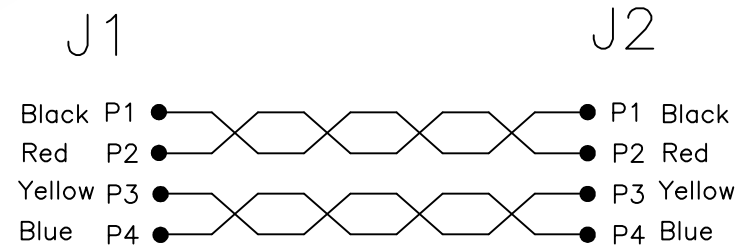

1	Housing	HJBRIGHT: H50801F-04P-01-A 5.08mm Pitch Housing Female 1*4P Black	1PCS
2	Terminal	HJBRIGHT: H50801TM-PQ-03 5.08mm Pitch Male Terminal Tin 20~24AWG	2PCS
3	Wire	UL1007(300V-80°C) #22AWG PVC Black Wire	1PCS
		UL1007(300V-80°C) #22AWG PVC Red Wire	1PCS
		UL1007(300V-80°C) #22AWG PVC Yellow Wire	1PCS
		UL1007(300V-80°C) #22AWG PVC Blue Wire	1PCS
4	cover	Cable protection cover - Heat shrink tube(Black)	1PCS
5	Terminal	Red nylon insulation sheath terminal tin plated	2PCS
A	Product Name	Designation	Quantity

			DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : HJ-H50801F-4P-01		HJBRIGHT 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
			CHKD.: Tony	LINEAR	ANGLES	DWG. NO.:				
			APPD.: Billy	X.:	x: ±5.0°	TITLE : H50801F Series Wire 4P		SHEET: 1/1	THIRD ANGLE PROJECTION	
1X	ORIGINAL	Judyyan		X.X:	x.X: ±3.0°	DATE: 23-Nov-2024		SCALE: 1:1		A4
	DESCRIPTION	DR.BY	ECN. NO.	X.XXX: ±	x.XXX: ±1.0°			UNIT: mm		